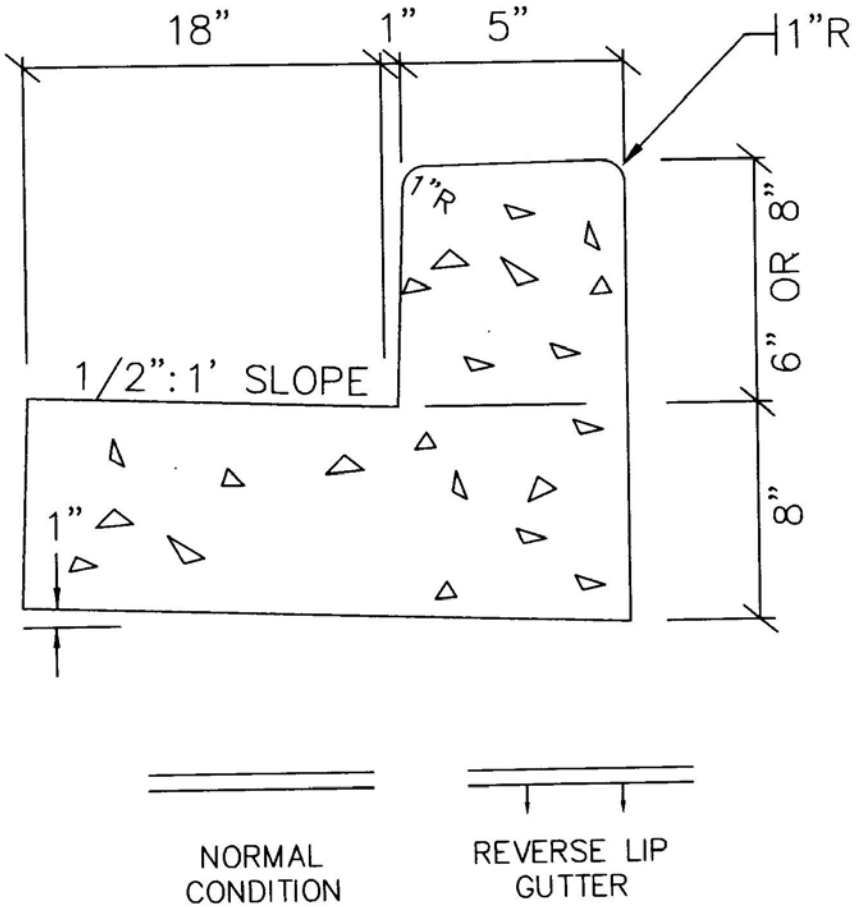

NOTES:

1. ALL STRAIGHT CURB AND GUTTER SHALL BE SHA MIX NO. 2, 3,000 PSI – 28 DAY COMPRESSION STRENGTH.

2. PROVIDE REVERSE LIP GUTTER PAN TO MATCH ADJACENT PAVEMENT WHERE WATER FLOWS AWAY FROM CURB AND WHERE CALLED FOR ON CONSTRUCTION DRAWINGS.

3. CURB HEIGHT SHALL BE ADJUSTED AND SET OUT ON CONSTRUCTION DRAWINGS. MINIMUM HORIZONTAL TRANSITION FROM 6" TO 8" HEIGHT IS 10'.

4. ALL METHODS OF CONSTRUCTION AND LOCATIONS OF CONSTRUCTION OR CONTRACTION JOINTS SHALL BE CONSISTENT WITH THE MDOT/SHA STANDARD SPECIFICATIONS FOR CONSTRUCTION AND MATERIALS, 2001 EDITION.

APPROVED 1-3-03 DATE ACTING DIRECTOR, DEPT. OF PUBLIC WORKS CHIEF ROADS ENGINEER	SCALE: NO SCALE REVISIONS:	QUEEN ANNE'S COUNTY DEPARTMENT OF PUBLIC WORKS **STRAIGHT CURB DETAIL** STANDARD NO. RD-103.02

SHARE1\CAD\ROAD STANDARDS\FINAL\STRAIGHT_CURB_DETAIL_103.02.DWG